


Zettonics TEN²¹ OM4/OM3 splice modules are designed for data centre and enterprise network applications, easy to handle and fast to install. With tool-less installation and one click latching technology, Zettonics TEN²¹ OM4/OM3 splice modules can be inserted and removed from both the front and the rear. They can be housed in either TEN²¹ 1U or 2U chassis, or 0U housings. They are designed for quick and efficient installation. The removable front adapter plate enables splicing and connector loading to take place outside of the module. With simple fibre routing for ribbon and single fibre splices and cable entry suitable for M20 or M12 glands or 10mm copex tubing.




Top View

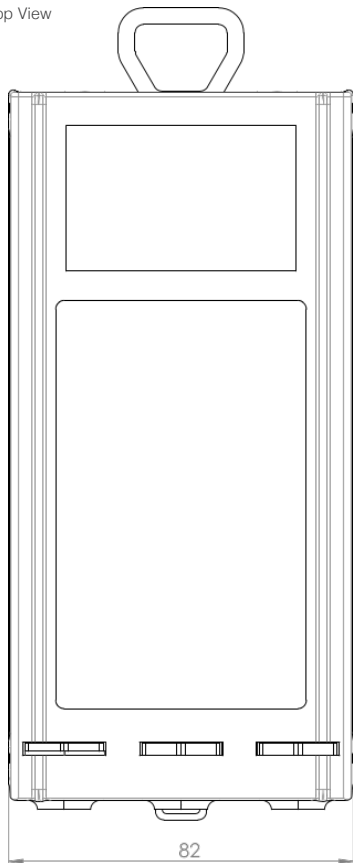

Dimensions (mm)


Side View

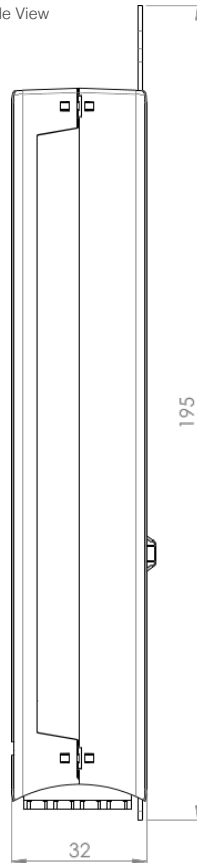

Rear View



Front View

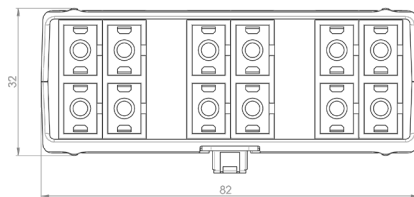

FLEXIBLE CONFIGURATIONS



FRONT & REAR CASSETTE LOADING




EASY CASSETTE LOCK AND RELEASE LATCHING MECHANISM

Product Specifications


Fibre Count	Up to 12 Fibres	Fibre Mode	OM4/OM3 50/125µm
Front Connector Type	6 x SC UPC Duplex	Rear Gland Type	M20, M12, 10mm Copex
Insertion Loss	SC≤0.2dB	Application	Compatible with Zettonics TEN ²¹ Chassis
Polarity	A/C		
Compliant with	TIA/EIA-568-3.D ISO/IEC 11801 EN 50173-1	Cassette Material	ABS, Smooth Finish, Black RAL (9005)
Product Dimensions (WxDxH)	82x195x32	Packaging Dimensions (WxDxH)	90x221x40mm
Free of Hazardous Substances	RoHS/REACH SVHC	Shipping Information	1/1 - 0.30kg

Example Ordering Information

ZMSCG1M412Z	Zettonics OM4/OM3 12 Fibre SC Splice Module, Coloured Pigtailed, 30mm Slim Splice Protectors, 1xM20 Gland
-------------	---



HIGH PERFORMANCE



SCALABLE SOLUTIONS



FAST LEAD TIMES